

**EXCLUSIVE
MACHINERY**





You have not touched the surface yet

We have put together a collection of digital products featuring photos, videos and specifications about the latest machinery available from Campey Turf Care Systems. This is also the best place to find the latest news from ourselves and the Sports Turf Care Industry.

Website - www.campeyturfcare.com

New and used product information, specifications, photographs, videos. Masses of industry information, news and some fantastic pitch renovation videos and much more.



Social Media

We use numerous social channels to help keep you instantly informed with news, information, photography, and video from Campeys and the turf care industry. We try to share the latest industry innovations and trends to keep you ahead of the game.

To find out more about the Campey Turf Care social presence please visit us at any of these channels.

 [Campey_Aus](#)

 [CampeySportsTurfMachinery](#)

 [CampeyMachinery](#)

 [Campey_australia](#)

INTRODUCTION

Honest, practical turf care experts

Campey Turf Care Systems has always provided customers with honest, practical turf care advice. For almost four decades, the company has introduced industry-defining machinery that has changed the way natural and hybrid pitches are maintained.

Seeking ways to innovate turf maintenance, and finding solutions to common issues every turf professional faces is a vital part of the Campey operation. Whether it's tackling localised compaction, aerating an entire pitch or the perfect spread with a Speeddresser, Campey has strived to provide an industry-leading solution for the needs of groundsmen at every level of sport.

Contents

CAMPEY™	04
Andersons	31
Bellon Mit	32
Martin Lishman	38
Classen Pro	40
Tomlin	41
Limpar	42
Fleming	44
Accu Products	45
Omarv	46





Innovative machinery designed by turf care experts for turf care experts

The Campey™ innovative turf care products are developed by leading turf care professionals responsible for introducing revolutionary techniques to the turf care industry.







CAMPEY™

Speedresser™ 18H

The Campey™ SPEEDRESSER™ 18H is a bulk drop-spreader designed to handle all topdressing materials. The 4 flotation tyres on a pivoting axle minimise the risk of turf damage and compaction. The high work rate enables the spreading of dressings up to depths of 2mm - 75mm in one pass, making it ideal for golf courses and sports fields use, both with private clubs, local authorities and contractors. The SPEEDRESSER™ 18H requires a tractor of at least 30hp and is driven hydraulically from the tractor via an agitator and twin rollers.

Specification

Spreading width	1.80m
Overall width	2.10m
Body Length	3.00m (2.00m with drawbar removed)
Hopper Capacity	2.25m³ (3.25m³ with hopper extension)
Loading height	1.40m (1.75m with hopper extension) (69")
Gross weight	4,000kg (5,500kg with hopper extension)
Weight (unladen)	960kg (1050kg with hopper extension)
Tractor requirement	50hp +. Spool valve. Pick up hitch/drawbar
Tyres	4 x Ultra Trac 26.5 x 14 x 12
Operating speed	Up to 12mph (18kph)

CAMPEY™

Speedresser™ 24H

The Campey™ SPEEDRESSER™ 24H is a 2.4m wide drop-spreader designed to handle all topdressing material. The four flotation tyres on a pivoting axle minimise the risk of turf damage and compaction. The high work rate enables the spreading of dressings up to depths of 2mm - 75mm in one pass, making it ideal for golf courses and sports fields use, both with private clubs, local authorities and contractors. The SPEEDRESSER™ 24H requires a tractor of at least 75hp and is PTO driven via a heavy-duty transmission to an agitator and twin rollers. The twin rollers are now hydraulically adjustable against a pre-set stop to alter spreading rate applications.

Specification

Spreading width	2.40m
Overall width	2.65m
Body Length	2.30m
Hopper Capacity	5.75m³
Loading height	2.00m
Gross weight	9,250kgs
Weight (unladen)	2,250kgs
Tractor requirement	75ph +. Pick up hitch or clevis drawbar & 2 spool valves
Tyres	4 x Flotation tyres - 15.5 x 14ply
Operating speed	Up to 12mph (18kph)
Options	Extra agitator recommended for fibre sand





CAMPEY™

Rake O Rotor

The Rake O Rotor is a bi-directional 2-speed rotor allowing for operation in both directions, featuring a 25-degree angle and 28-degree tilt for ease in swaling and ditching. Oscillating gauge wheels lock in a level position for 3 point hitch use for reliable operation, and the dual-motor design delivers 40% more power whilst eliminating the need for outside bearings and chains. The Rake O Rotor also features a floating rotor design and increased durability with carbide teeth, ditch cutters and side shield. The Rake O Rotor can be used on a 3 point hitch or a skid steer hitch system.

Specification

Working width	1.8m (72")
Width	2.0m (80")
Height	0.75m (30")
Weight	500kgs
Drum speed	0-600rpm


CAMPEY™

Sportsfield Harrow

The CAMPEY™ Sportsfield Harrow is a tractor mounted implement for aggressive surface grooming. It can be used on turf, for standing prone grasses, dragging out dead or dying organic matter, or creating a tilth prior to seeding. The Campey™ Sportsfield Harrow also has an application for grooming on hard porous surfaces and is also ideal for gravel paths where regular use will prevent the accumulation of moss and algae. This 3-point linkage model can be mounted on all compact tractors of around 25hp and above.

Specification

Working width	2.5m
Spacing of tines	50mm
Diameter of tines	6mm
No of tines	33 double prong tines, interpitched
Weight	120kg
Power requirements	25hp
Tractor requirements	Cat 1, 3 - point linkage

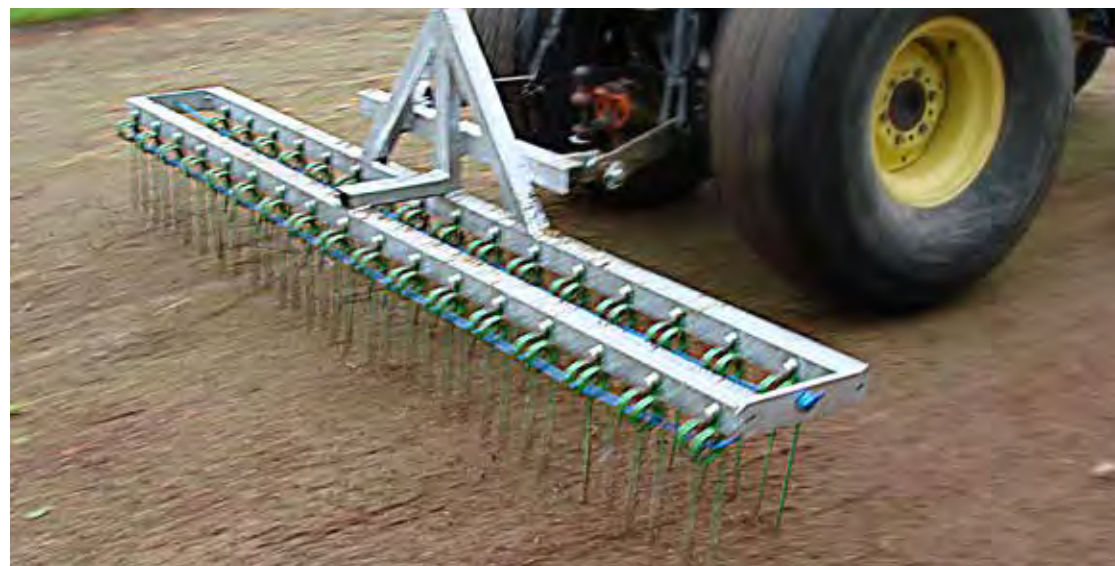





CAMPEY™

UNIRAKE™

The Campey™ UNIRAKE™ is designed for and by leading groundsmen to accurately maintain natural and synthetic grass including hybrid surfaces. The Campey™ UNIRAKE™ offers high intensity grooming that can be calibrated in its severity.

“ We looked to the UniRake to improve our maintenance operation on the Desso constructed pitches and to take some of the weaker grasses out. This is because the pitches get quite thick before the end of the season, but we also use it during the renovation as well, and It's been a huge success for us. ”

Andy Jackson,
Head Groundsman, Stoke City Football Club

Specification

Working width	2.0m
Length	1.80m
Number of tines	136
Tine length	1337mm
Weight (approx)	265kgs
Power requirement	25hp +
Options	Brush



CAMPEY™

Uni-Scratch

The Campey™ Uni-Scratch is the ideal solution for those looking for professional and effective maintenance of natural and synthetic grass surface.


The Campey™ Uni-Scratch has been developed to infill or refill when installing or looking after synthetic grass carpets. It can also be used for the final organic matter removal on natural grass hybrid carpet pitches when carrying out annual renovations.

The Uni-Scratch moves on 4 supporting rollers which are adjustable in height to allow the most appropriate working depth. The rotors can be equipped with springs or linear brushes in PPL. Fits on tractors of at least 30HP.

Specification	1500	2200
Tines	3mm / 4mm optional	3mm / 4mm optional
No. of rotor	4	6
No. of springs for each rotor	16	16
Diameter of spring tine	3.2mm	3.2mm
Size	0.90m (h) x 1.55m (w) x 1.00m (d)	0.80m (h) x 2.40m (w) x 1.00m (d)
Weight (approx)	454kgs	700kgs
Working speed	1 - 3mph	1 – 3mph
Power requirement	Minimum of 30hp	Minimum of 50hp
Tractor requirement	540 PTO	540 PTO





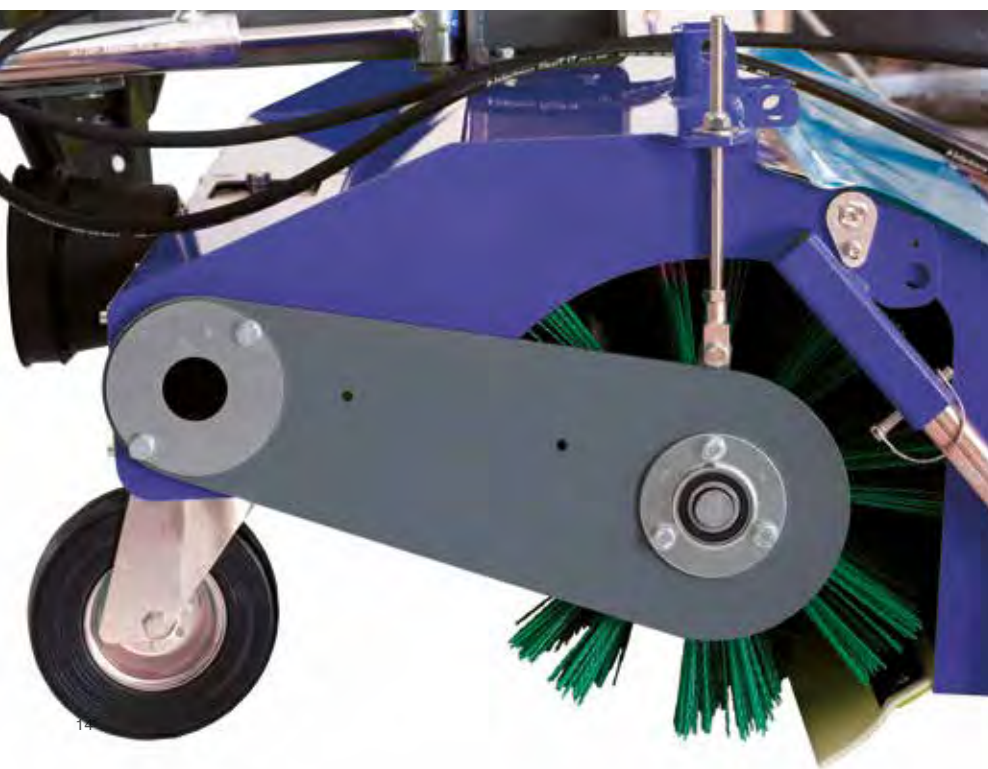

CAMPEY™

Uni-Brush

Campey™ Uni-Brush Front Sweeper has been developed to fit tractors from 18 to 60 Hp. The compact design improves the handling to guarantee a fast and accurate work in any conditions.

The Campey™ Uni-Brush Front Sweeper is equipped with roller brushes, suitable for snow removal, dirt and debris removal on driveways. Extremely versatile for any kind of work, the right tool for cleaning driveways, service areas, parking lots and yards, and snow removal. The gearbox, featuring fully hardened steel gears and ball bearings in oil bath enclosed in a cast-iron housing, and the double-chain secondary transmission reduce maintenance to a simple periodic check of the oil level and brush wear.

Specification

Model	TSPF4 1200	TSPF4 1500
Working width	1.20m	1.50m
Max width	1.31m	1.61m
Max height	0.81m	0.81m
Length without collector	0.92m	0.92m
Length with collector	1.34m	1.34m
Working width 25° turn angle	1.10m	1.37m
Weight	130kgs	160kgs
PTO height	0.33m	0.33m
Ø Brush	0.40m	0.40m
Options	25° Hydraulic Angling Kit Front Loader Interface - model variations Collector Hopper with hydraulic tip function Gulley Brush Rear Roller to be used in lieu of caster wheels	

Other model sizes are available upon request.

CAMPEY™

Electric Sarel Roller

Ideal for bowling greens and cricket squares

The CAMPEY™ Electric Sarel Roller is a high-quality 60 cm aerating roller designed for sports turf care, specifically for soil aeration and improved grass health. With its sharp spikes, the roller effectively penetrates the soil, enhancing air circulation and water absorption. This process reduces soil compaction and promotes stronger root growth. The tool is ideal for areas up to 3,000 m², making it efficient for both small and large sports turf spaces. It features a transport roller that helps protect the spikes during movement, ensuring durability. Powered by a battery, which allows for eco-friendly operation. The battery provides ample runtime to cover large areas, and its silent operation makes it ideal for noise-sensitive environments.

Specification

Diameter spike	0,8 cm
Diameter spiked roller	39 cm
Dimensions (W x D x H)	66 x 49 x 145 cm
Punctures per m²	223 St.
Quantity of spikes	70 St.
Area coverage per battery charge	ca. 3.000 m²
Quantity of batteries / drives	1 / 1
Total weight	37 kg
Battery performance / type	612 Wh / Li-Ion
Operating voltage	36 V DC
Output voltage	42,5 V DC / 5 A





CAMPEY™

Triple V Brush

The CAMPEY™ Triple V Brush is a tractor mounted implement for brushing in topdressing removing worm casts, standing up grass prior to mowing and general presentation on natural turf.

The Campey™ V Brush is also suitable for use on sand-filled and 3G synthetic pitches for taking out scuffs and footprints, re-distributing infill and promoting a vertical sward. The reversible mounting frame enables the V Brush to be mounted on the rear or front linkage on tractors of 18hp and above. Individual brush sections can easily be replaced when worn.

Specification

Working width	1.8m
Weight	100kgs
Power requirements	18hp
Tractor requirements	Cat 1, 3 point linkage
Options	Yellow Bristles for synthetic



CAMPEY™

Triangle Brush

A tractor mounted Triangle Brush which is ideal for standing up the pile, brushing surface infill to an even level finish and eye-catching presentation.



CAMPEY™

Seed Shot™

Perfect for targeted seeding post-game, depositing a precise quantity of seed into the soil for optimal germination rates.

- Makes a hole for the seed to go into
- For Rye grass or similar size seed
- 19 x holes
- 7mm diameter
- Up to 20mm deep
- Approx 22mm radial distance apart
- Weighs 3.5KG

CAMPEY™

Front Mounted Brush


for Pedestrian Rotary Mowers



Softie Brush



Stiffy Brush

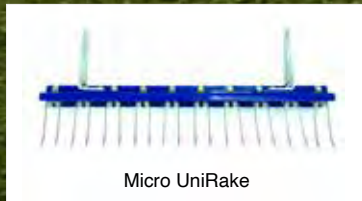

Micro UniRake



Designed for fitting to Honda, Kaaz
and Lawnflite pedestrian rotary mowers



CAMPEY™

Synthoflex Brush

A 3 point linkage mounted brush suitable for compact tractors of 15hp. The Synthoflex brush is designed for regular use on all artificial surfaces to help stand up the pile and level the rubber crumb. The stiffness of the bristles can be easily adjusted using the plastic stiffening board on the all galvanised / plastic construction unit.

Specification

Working width	1.8m
Transport width	1.80m x 1.00m x 0.20m
Weight	40kgs
Tractor required	15hp

CAMPEY™

Dragmats

The CAMPEY™ Dragmats come in various sizes and are available in heavy-duty reinforced rubber or steel construction. Dragmats are ideal for rubbing-in topdressings and dew and clippings dispersal. Small mats can be hand-pulled, while the wider units are more suited to towing or mounting on the optional 3-point frame. Available in four different widths and two different thicknesses (rubber) for various handling applications and tasks.

Specification

Easy Dragmat type		Approx sizes (m) W x L		
Rubber Mats 20mm thick	1.2m x 1.8m	1.8m x 1.8m	2.4m x 1.8m	
Rubber Mats 12mm thick	1.2m x 1.8m	1.8m x 1.8m	2.4m x 1.8m	
Steel Mats 12mm thick	0.9m x 1.2m	1.8m x 1.2m	2.4m x 1.2m	
Options	Handle bar	N/A	N/A	
	3 - point mounting frame			





CAMPEY™

LineMarker LM3010 / LM3012

The CAMPEY™ LM3010 / LM3012 is a simple, durable and easy to operate liquid transfer line marker. Marking material is transferred from the 30ltr hopper to the 10cm or 12cm wide marking wheel by a grooved rubber roller, giving even and accurate lines with the front roller, allowing marking up to the flag or post. The marker features adjustable tubular steel handles, pneumatic tyres and an adjustable flow rate. Recommended marking materials include propriety marking paints, emulsion paint, etc. Always check marking materials comply with H.S.E guidelines for sports field use.

Specification

Marking width	10cm 12cm
Overall / transport width	60cm
Hopper capacity	15 litres (3 gallons)
Weight (approx)	19.5kg
Carton dimensions	620mm x 660mm x 310mm

CAMPEY™

Mega Magnet

The Mega Magnet has been designed for use on turf areas after events such as concerts and help clean the pitch of any metal debris such as screws, bolts and other metal objects not wanted on the surface.

Specification

Width	6ft (1829mm)
Power requirement	20hp
Tractor requirements	3pt mounted





CAMPEY™

TDS2 Sub surface sports turf decompactor

The CAMPEY™ TDS2 is a heavy duty twin leg subsoiler designed specifically for the turfcare industry. Designed to operate behind a 40hp tractor on turf tyres, the Campey TDS2 is easily adjusted to relieve compaction and aid drainage at depths between 9.5 and 37.5cm. Weighing less than 430kgs and fitted with Cat I and Cat II hitch, the Campey TDS2 is designed to deliver a sub-surface shattering effect quickly and effectively with minimum surface disturbance. This creates fissures for grass roots to into, allows excess water to drain and links up existing drainage all without the need for external hydraulics or PTO.

Designed and manufactured in the UK by their highly skilled production team, Sumo has a worldwide reputation for the highest quality, durable cultivation equipment. This combined with Campey's renowned reputation for innovation in the turfcare industry has brought two market leaders together to deliver a simple but highly effective sub surface decompactor.

Specification

Overall transport width	1.70m	Number of legs	2
Operating depth	9.5 - 37.5cms		
Weight	430kgs	Roller type	Smooth
Roller width	1.55m	Adjustment type	Pin
Horsepower required	>40hp	Weight	698kgs
Hitch	Cat I,II	Breakback Protection	Shear bolt

CAMPEY™

Landscaper

The CAMPEY™ Lanscaper is designed to construct a well graded, tilled and pulverized seed bed which is the first step to a healthy durable sward. Available in 2 different widths the Lanscaper has the flexibility to carry out a number of different funtions to suit the size of tractor available and the area of land to be prepared. The base unit will accept a Ripper Bar to break into a compacted surface, a levelling harrow and a Crumber Roller to pulverize the soil & lightly restore the surface. An optional seed hopper attachment can also be fitted to complete a one-pass operation.

Specification

Model	1.2	1.5	1.8
Working width	1.20m	1.50m	1.80m
Wt c/w harrow & crumber	238kg	300kg	352kg
Wt c/w harrow, crumber & ripper	N/A	330kg	435kg
Wt of optional seed hopper	50kg	55kg	58kg
Depth of Ripper Teeth	N/A	0-125mm	0-125mm
Tractor requirement approx.	25	30	35





CAMPEY™

Aeraseeder

The Campey™ Aeraseeders are a range of heavy-duty '2-in-1' overseeders designed for overseeding greens, tees, sports fields & other similar fine turf surfaces, with minimal disruption to the existing sward. The unique angled coned rollers produce approx 1750 holes per sq. metre, and the rear mounted brush ensures that seed is swept into the holes created by the coned roller. The hopper has an internal agitator to ensure a smooth seed flow and a floating headstock ensures good contour following. Available in 2 working widths. The Aeraseeder can be supplied coned / coned or coned / flat roller.

Specification

Model	1200	1800	2400
Working width	1.20m	1.80m	2.40m
Overall working width	1.30m	2.10m	2.67m
Hopper capacity	0.17m ³	0.42m ³	0.56m ³
Weight (empty hopper)	209kg	583kg	635kgs
Spike length	38mm	38mm	38mm
Roller perforations	1750 holes / m ²		
Options	Rear platform and brush (with coned spike roller)		

CAMPEY™

Pedestrian AeraSeeder

The 60cm Pedestrian Aeraseeder from Campeys provides simple, yet accurate initial and overseeding in those “hard to get at” places. At only 83cms wide, with a seeding area of 60cms, this mightily little machine will quickly overseed your golf greens, cemeteries, goal mouths, garden areas, and any other bare areas. The multi-spiked roller produces approx. 800 perforations per square yard, effectively saturating the top surface with a network of holes. This network, combined with our stainless steel seed apertures, brush, and smooth packing roller systems, offers the highest percentage of grass seed germination.

Specification

Seeding width	0.6m
Dimensions (WxLxH)	0.83m x 1.52m x 0.94m
Weight (approx)	182kgs
Front Roller	Cone
Rear Roller	Smooth





CAMPEY™

TPC Easy Load Trailer

The CAMPEY™ TPC Easy Load trailer is ideal for transporting the Toro Procore 648 to wherever it's being used. The Procore can be loaded with swath boards, with or without a core collector fitted. The fully galvanised trailer, complete with 50mm ball or clevis drawbar and a locking mechanism, makes for safe, easy transportation (travelling up to 15mph/25kph), with a ratchet strap fitted over the front wheel to secure it.

Specification

Length	3.65m
Width	1.72m
Weight	185kgs
Includes	Ratchet Strap for front wheel of machine on the trailer

* Not for road use

CAMPEY™

Easy-Load Trailer

Specialist easy-load trailer for transporting machinery on roads and across turf areas. Designed to transport the Air2G2, it will also accommodate other popular turf machinery like the Toro Procore, John Deere Aeracore, and small ride-on mowers. Fully road worthy, with brakes and lighting, the tail-board ramp lowers to allow safe and easy loading, and the tie-downs supplied will secure machinery in place. Supplied with spare wheel.

Specification

Overall Length & Width	380cm x 178cm
Body Load Space	250cm x 178cm
Wheel - Tyre size	195 x 55 - 10
Gross Weight	1300k
Unladen Weight	300kg
Maximum payload	1000kg





CAMPEY™

Groundsmower Trailer

The Campey™ Groundsmower trailer is ideal to move any grounds mower around easily and efficeintly. Designed to be towed by any utility vehcile, or tractor. Manual lowering of trailer bed to allow effortlessly loading of the mowers, reducing unnecessary damage to the rollers on the cutting units. Can accommodate up to 2 mowers (depending on size). Equipped with safety bar to keep mower(s) in position when travelling.

Specification

Length	3.65m
Width	1.72m
Weight	185kgs




ANDERSONS

SR2000 Rotary Spreader

The SR-2000 is a very efficient fertiliser spreader which has a setting rate. It also has a shut-off control switch, limiting the amount of wasted fertiliser / seed. It evenly dispenses the product over a large area; having a capacity of 42 litres (22 kg) and a spray pattern from 2 – 6 metres. This saves time as the spreader will not need to be refilled too often.

Additionally its durable, stainless steel frame rests upon large wheels that will not leave any tread marks during application.

- Reliable fertiliser spreader, good for years of service
- Sturdy stainless steel frame
- Equipped with a setting rate and shut off switch
- Can carry 42 litres, or 22 kg of seed / fertilizer
- Has a spray pattern of 2 – 6 metres
- Wheels do not leave behind any tracks

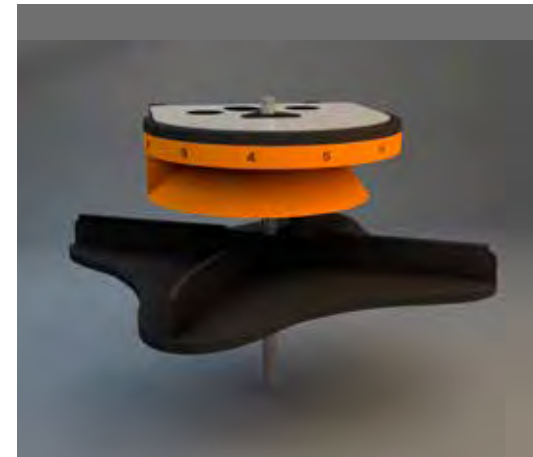



Campsey[®]
SUPER CHARGE SYSTEMS
QUALITY GOLF CARE EQUIPMENT



Campsey[®]
SUPER CHARGE SYSTEMS
QUALITY GOLF CARE EQUIPMENT



Professional scarifiers exclusively
from Campey Turf Care Systems

Campey
TURF CARE SYSTEMS
AUSTRALASIA

EXCLUSIVE
Bellonmit
DISTRIBUTOR



BELLON MIT

BM40 Scarifier with Collector

BM40 is a professional scarifier with fixed blade collection. Due to the blade fixing system, their replacement does not require the complete disassembly of the transmission and rotor, but only of the worn blades. The high-performance rotor guarantees excellent work in all conditions, even when the cutting edge of the blade is not in optimal condition. In addition, the collector with hydraulic discharge on the ground allows the material removed from the ground to be collected in a single pass. The high ventilation created by the rotor allows it to be used also as a leaf vacuum.

Specification

Model	BM40 - 1600
Number of blades	120
Working width	1.55m
Working depth	0.4m
Height	1.58m
Length	2.00m
Depth	1.25m
Weight	690kgs
Tractor	HP: 40+
PTO	540rpm

BELLON MIT

BM45 Scarifier with Hi-Tip Collection

BM45 Scarifier with Hi-Tip Collection is a professional scarifier with fixed blade collection. Due to the blade fixing system, their replacement does not require the complete disassembly of the transmission and rotor, but only of the worn blades. The high-performance rotor guarantees excellent work in all conditions, even when the cutting edge of the blade is not in optimal condition. In addition, the collector with hydraulic discharge on the ground allows the material removed from the ground to be collected in a single pass. The high ventilation created by the rotor allows it to be used also as a leaf vacuum.

Specification

Model	BM45 - 1600	BM45 - 1800
No. of blades	132	150
No. of blades (spacer 15mm)	264	300
Working width	1.55m	1.75m
Working depth	0.04m	0.04m
Height	1.3m	1.3 m
Length	1.75m	1.75m
Weight	780kgs	920kgs
Maximum speed	2-3KM/h	
Tractor HP	40-60	60-80
PTO	540rpm	540rpm

Spacing Options: 30mm standard and 20mm as an option





BELLON MIT

BM50 Verti-Cutter

The BM50 Verti-Cutter is a professional scarifier with fixed blades. Due to the fixed blade system, it does not require the complete disassembly of the transmission and rotor, but only of the worn blades. The high performance rotor guarantees excellent work in all circumstances, even when the cutting edge of the blade is not in optimal condition. In the standard version the blades are made of HARDOX material with a thickness of 3mm and spaced 30mm apart.

*Optional 2mm and 3mm tungsten tipped blades available.

Specification

Model	BM50 - 1600	BM50 - 1800
No. of blades	96	104
Working width	1.60m	1.80m
Working depth	0.05m	0.05m
Height	0.8m	0.8m
Length	1.95m	2.15m
Depth	1.4m (with wheels) 1.0m (without wheels)	
Weight	250kgs (with wheels) 210kgs (without wheels)	290kgs (with wheels) 250kgs (without wheels)
Tractor HP	25	30
Weight of kit wheels for floating system	60kgs	

Wheels are standard and can be removed

BELLON MIT

BM60 Rake

The BM60 is a spring rake designed for the maintenance of large gardens, parks, football fields, golf courses and other types of green areas. Thanks to a high working speed and continuous vibration of the springs, this product allows to remove the thatch from the ground without clogging the springs themselves and to obtain surface scarification at the same time. The rear wheel kit allows the use of the BM60 also for the maintenance of synthetic turf surfaces if there is a need to loosen the infill compacted due to weather conditions, or intense use. As well as during the installation phase of the turf for the clogging of organic material or rubber.

Specification

Power	30 hp-kw
Working width	1700mm
Tine	3mm
Height/width/depth	1000 x 2000 x 800
Weight	150





MARTIN LISHMAN

Nano-Spray

The Martin Lishman Nano-Spray is the next generation of self-propelled pedestrian sprayer, a revolutionary self-propelled pedestrian sprayer designed for precision application in small amenity areas. Unlike traditional sprayers that can damage delicate turf, the Nano-Spray offers a compact, electric solution that minimises impact while maximising efficiency. With its ultra-lightweight design and 1.5-meter folding boom, it easily navigates narrow passageways and gateways, making it ideal for tennis courts, cricket grounds, and private lawns.

Equipped with pro-grade features like stainless steel spray lines, a 2-way valve block with pressure regulation, and tank agitation, the Nano-Spray sets a new standard for small-scale spraying equipment. Its ergonomic control interface provides fingertip precision, allowing users to adjust speed, monitor battery levels, and make on-the-spot adjustments with ease. Powered by a custom-built 24-volt lithium battery pack, it delivers over an hour of continuous spraying, with the option to extend runtime by storing additional batteries.

Maintenance is a breeze with the Nano-Spray's simple design, minimising downtime and ensuring consistent performance. With its innovative features and unparalleled convenience, the Nano-Spray is poised to revolutionise small-scale spraying, providing contractors and operators with a reliable solution for precise, efficient application in even the most delicate environments.

Specification

Tank Size	36 L
Boom	1.5m 2 section folding
Pump	12.9 L/min
Power	24v
Valve Block	Manual 2 section
Dimensions	H:640mm - 1400mm W:620mm - 680mm D:850mm
Weight	37kg (empty), 73kg (full)

MARTIN LISHMAN

Micro Spray

Combining control and power with responsive easy handling, the Martin Lishman Micro-Spray pedestrian sprayer is designed for all types of sports grounds, golf courses and landscaping work. The Micro-Spray brings a new concept in spraying versatility to the groundsman's armoury. First launched in 2011, the Micro-Spray now comes with an upgraded specification, making it more versatile in a wider range of situations. A 150 litre tank with a 2.5m 6 nozzle, 3 section folding boom with break back and height adjustment, independent shut-off nozzle bodies and reduced drift air inclusion nozzles will suit the majority of spraying situations. An optional hand lance for spot treatments and a bout marker are also available. The Micro-Spray has a narrow footprint so it can fit through most gateways and passageways to tackle hard to reach spraying areas. The design ensures it also has a low centre of gravity.

The comprehensive yet easy to use control box gives the operator more control over the sprayer with changeable motor direction to either walk behind or in front of the sprayer, 12 motor speeds, bout marker selection and a battery level indicator.

Specification

Model	SP/MC/120/P/25	SP/MC/120/P/35
Tank size	150 litre	150 litre
Boom	2.5m 3 section folding	3.5m
Pump	23 L/min	23 L/min
Power	12V	12V
Valve block	Manual 3 section	Manual 3 section
Hand lance	Optional extra	Optional extra
Weight (full)	370kg	373kg



CLASSEN PRO

MPRO HSC18 Hydro-Drive

Maximize productivity for any application big or small with the PRO HSC18 Turf Cutter. Whether you are repositioning or relocating turf or expanding landscaping areas, the hydrostatic drive delivers high productivity with smooth power in both forward and reverse while providing the industry's fastest transport speed.

- Powered forward and reverse with industry-best 4.7 mph transport speed
- Integrated throttle/clutch control on handle results in simple operation; releasing the handle puts the machine into idle
- Advanced vibration dampening systems provides enhanced operator comfort even with extended run times
- Integrated rear swivel wheel provides turning ease and locks in place for straight-line cutting
- Knobby tread drive wheels grip the turf better and reduce dirt buildup





TOMLIN

Tipping Trailer

The Tomlin Trailers a strong built hydraulic tipping trailer. Supplied with turf tyres. It is suitable for a wide range of jobs, it has the option to have KORO FTM ready made extension sides to be fitted.

TTR 2.0 Trailer

2 tonne hydraulic, rear tipping trailer on 300mm turf tyres. 2.44 x 1.52 trailer bed. Optional set of 460mm high mesh extension sides

TTR 3.5 Trailer

3.5 tonne hydraulic, rear tipping trailer on 390mm turf tyres. 3.05 x 1.83 trailer bed.

As above, with 1m high, mesh front & solid RH side extensions (for Koro Work)

TTR 4.0 Trailer

4 tonne hydraulic, rear tipping trailer on 390mm turf tyres. 3.35 x 1.83 trailer bed, with hydraulic brakes & handbrake.

As above, with mesh front & solid RH side extensions (for Koro Work)



Roller

T180R

1.8m wide 3pt mounted. Ballast Roller. 406mm diameter. 190kg - 430kg.

LIMPAR

72 Brush

This is an entry-level model, ideal for spring cleaning or removing foliage and winter service - for every season and every purpose corresponding accessories are available e.g. collecting box, snow blade, snow chains or different brush types. This allows you to do your cleaning tasks professionally.

The sweeping brushes are centrally driven - this permits wall conclusive sweeping, also in connection with a stable plastic collector. The brush pressure is continuously adjustable and, the brushes can be swivelled in different positions. The handlebar is easily adjustable to your body size.

70cm work width

Compact & easy to handle

High quality poly brushes, 10 elements

1 driving speed

1 brush speed

Handlebar (foldable) with height adjustment

Honda GCV 160 OHC motor


Available accessories

Sweepings container (PVC)

Snow plough

Snow chains

Wheels with agricultural profile

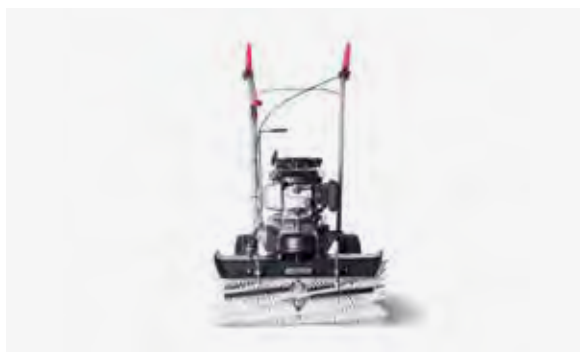

LIMPAR

V50 Greens Scarifier

A beautiful, green lawn requires special care. In addition to mowing, in particular, regular scarifying is required. Our scarifiers free the turf of weeds, moss and lawn thatch, so that water and nutrients can again get to the roots.

With their hardened blades they chop the flat-growing weeds, comb out the moss and gently loosen the soil so that fertiliser and nutrients can again get to the roots. The lawn is gently maintained and will soon be a luxuriant green again.

The V40 and V50 have a stable, robust and torsion-free housing with hardened blades for long satisfaction with your device and steel rim tyres with ball bearings that are driven by powerful motors – ideal for professional use in harsh conditions or for the demanding user.



50cm work width

Stationary or flying blades

Variable height adjustment

Honda GP 160 OHV motor



FLEMING

Fertiliser Spreaders

The Fleming Sitrex Wagtail Fertiliser Spreaders large capacity fertiliser spreader. The Wagtail Fertiliser Spreaders are suitable for use on small tractors. This implement is also a cost effective means of spreading large quantities of fertiliser.

Model	FSC500W	FSC800W
Load Capacity	500L	800L
Max Height	1m	1.07m
Spreading Width	6-12m	6-12m
Weight	130kg	175kg





ACCU PRODUCTS

Accu-Gage®

The Digital Accu-Guage is the preferred height of cut setting tool for the professional groundsman & greenkeeper. Tines Direct are pleased to offer our bespoke specification as follows:

- 18" Bar length - most popular size to suit greens, tees and outfield cutting units
- Digital - for ease of reading & setting
- Metric nomination - for UK & Europe
- Aluminium carry case - protection for your gauge, with die cut foam for perfect fit





OFFICIAL
OMARV
DISTRIBUTOR

The Italian collection

The award winning Omarv range of professional
flail mowers and collectors

Available Exclusively From Campey Turf Care Systems

OMARV

Alba

The Omarv Alba range is the smallest of the mounted flail mowers, designed for use behind compact tractors in the 25 - 55hp range. The mowers are heavy-duty, the hopper has slightly more capacity & a hi-tip hydraulic discharge option is available. There are three model width options, all fitted with cutting blades. Suitable for golf courses, sports fields and general amenity use.

Specification	ALBA 120	ALBA 140	ALBA 160
Working width	1.15m	1.35m	1.55m
Overall width	1.40m	1.60m	1.80m
Hopper capacity	600ltr	800ltr	1000ltr
Number of cutting blades	18	20	24
Weight	420kg	480kg	545kg
Tractor power	25 - 35hp	35 - 40hp	40 - 55hp
Tractor requirement	540 PTO, hydraulic spool valve		



OMARV


Venezia

This top of the range trailed flail mower / collector is designed for use behind tractors in the 55 - 90hp range. It is extremely heavy-duty and suitable for grass mowing and thick brush cutting. While suited to sports field and golf course use, it has wider use in amenity grassland maintenance and heathland management. Features include electro-hydraulic cutting height adjustment and automatic belt tensioner. Unloading can be carried out directly into trailers or lorries for disposal with the hi-tip facility, and the draw-bar can be offset by 40cm to allow close mowing to walls & perimeter hedges, etc.



Specification	140	190	225
Working width	1.40m	1.90m	2.25m
Overall width	1.80m	2.40m	2.40m
Hopper capacity	350m ³	750m ³	850m ³
Tipping height	1.80m	2.80m	2.80m
Weight (unladen)	1,850kg	3,950kg	4,250kg
Number of flail blades	14	20	24
Wheels	13.0/55.16	19.0/45.17	19.0/45.17
Tractor power	55 -70hp	90hp - 100hp	90hp - 100hp



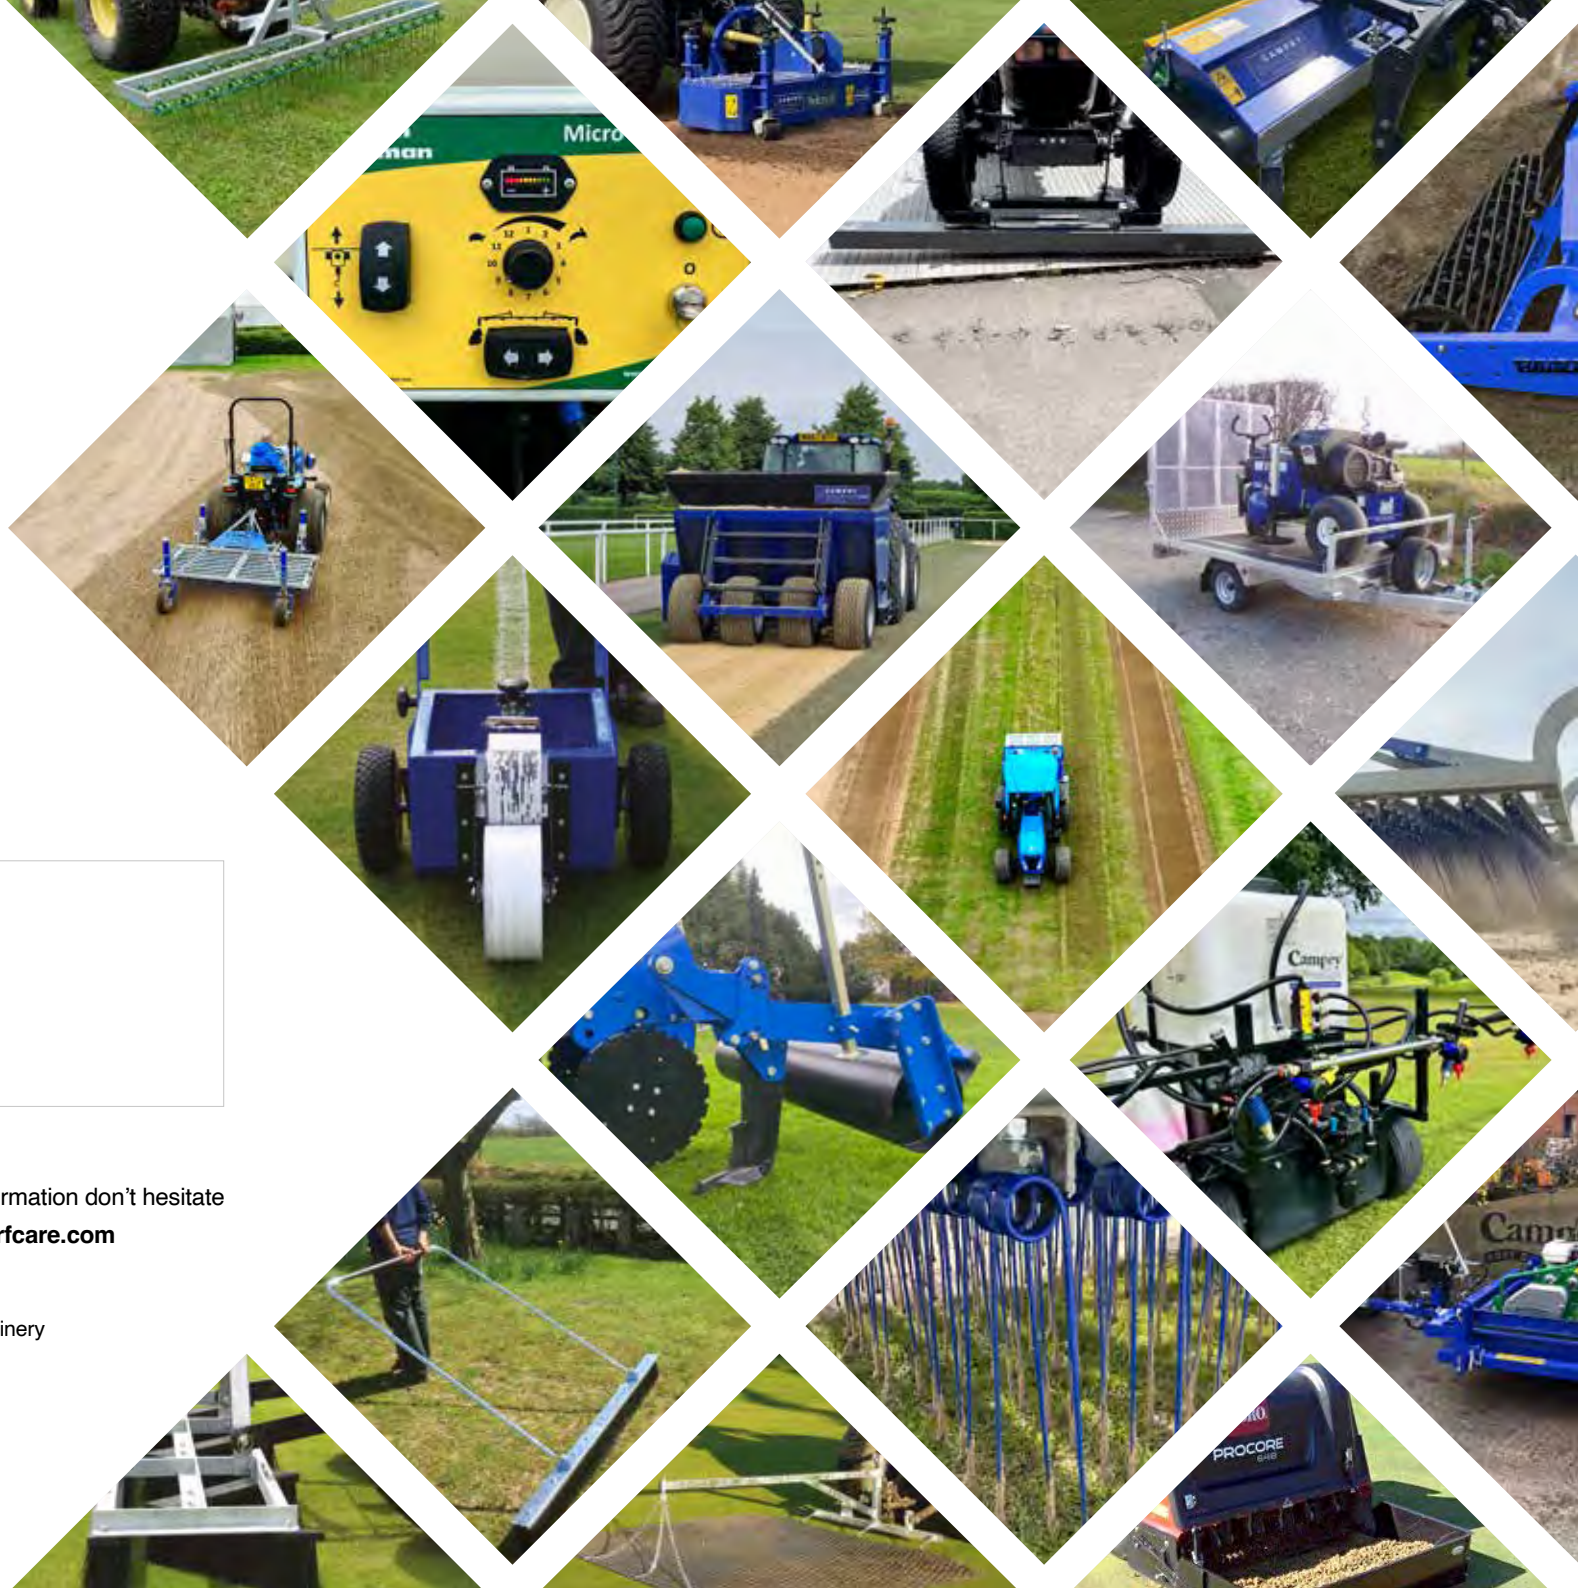





Your Campey Australasia nearest dealer is:

 Campey_Aus
  CampeySportsTurfMachinery

 CampeyMachinery
  Campey_australia